

Pričvrtni elementi za okvire i letve



Tipla za skele GR



Tipla za skele GR



vijak s metalnim prstenom OES




Prednosti


- Specijalna tipla za sve vrste pričvršćivanja skela u punim građevinskim materijalima prema DIN 4420 i propisima u građevinarstvu
- Najlonska tipla GR se za optimalan učinak koristi s vijkom s metalnim prstenom OES za visoke nosivosti
- Oznake na vijku olakšavaju kontrolu pričvršćivanja
- Tipla ima kapicu za zatvaranje

Prikladni građevinski materijali

- ✓ Beton
- ✓ Puna opeka
- ✓ Prirodni kamen
- ✓ Puni silikatni blok

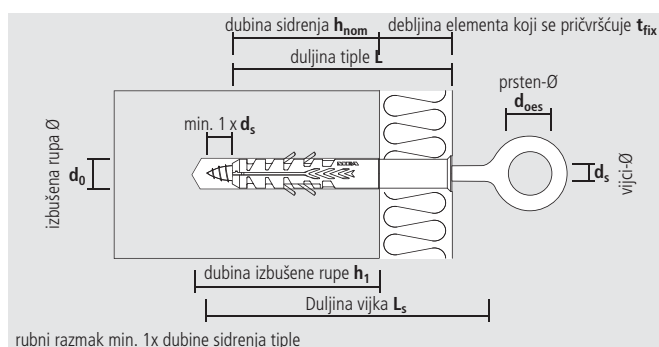

Montaža

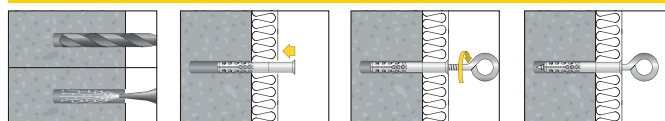

GR								Cijena		Pakiranje	
Tip	Br. art.		d ₀ [mm]	h ₁ ≥ [mm]	h _{nom} ≥ [mm]	L [mm]	t _{fix} ≤ [mm]	€/100 kom.	[kom.]	[kom.]	
	novi	stari									
GR 14-70	91470GR	502510	14	90	70	70	0		40	320	
GR 14-100	914100GR	502512	14	90	70	100	30		40	320	
GR 14-135	914135GR	502514	14	90	70	135	65		40	320	
GR 14-185	914185GR	502508	14	90	70	185	115		40	320	

Opterećenja F_{opt} kod korištenja vijaka s metalnim prstenom Ø 12

Tip	Concrete C20/25 F _{opt} [kN]	Puna opeka MZ 12 F _{opt} [kN]	Silikatni blok KSV 12 F _{opt} [kN]
GR 14	15,0	14,0	15,0

F_{opt}: stvarno opterećenje bez sigurnosne vrijednosti



OES, galv. poc.

OES, galv. poc.							Cijena		Pakiranje	
Tip	Br. art.		d _s [mm]	L _s [mm]	d _{oes} [mm]	€/100 kom.	[kom.]	[kom.]		
	novi	stari								
OES 12-90	91290OES	502522	12	90	23		20			
OES 12-120	912120OES	502524	12	120	23		20			
OES 12-160	912160OES	502526	12	160	23		20			
OES 12-190	912190OES	502528	12	190	23		20			
OES 12-230	912230OES	502530	12	230	23		20			
OES 12-300	912300OES	502534	12	300	23		20			
OES 12-350	912350OES	502532	12	350	23		20			



AK za GR					Cijena		Pakiranje	
Tip	Br. art.		Odgovara d _s [mm]	Duljina [mm]	€/100 kom.	[kom.]	[kom.]	
	novi	stari						
Kapica AK	91AKGR	502540	GR 14	53		50	600	